

7410

Quad Tri-Level Sync Generator



The 7410 Quad Tri-Level Sync Generator is for use in high definition television and post applications. Two reference inputs allow the module to lock to any two PAL, NTSC, or 10 MHz references. The 7410 can also operate as a stand-alone master generator.

Each of the four outputs is independent and can be set to output a different Tri-Level Sync signal. The timing of each generator can be set independently. A variety of user-selectable formats are supported including: 1080i, 720p, 1080p and 1080sF. The 7410 is well suited for facilities that need the flexibility of having simultaneous 720 and 1080 Tri-Level Sync outputs.

Use this module in conjunction with the 7400 SPG/TSG for a complete reference solution.

Features

- **Eight Tri-Level Sync outputs**
- **Simultaneously outputs four different Tri-Level signals**
- **Can provide 50 Hz and 60 Hz outputs simultaneously**
- **Locks to two references or can be a master generator**

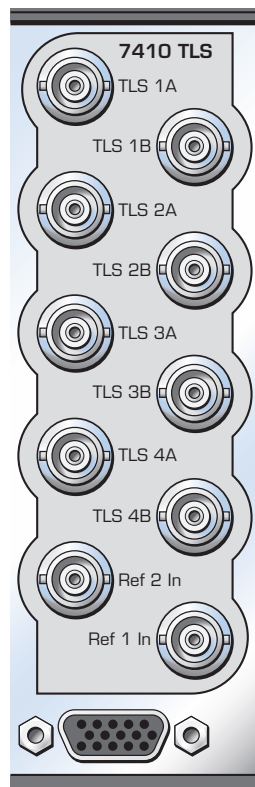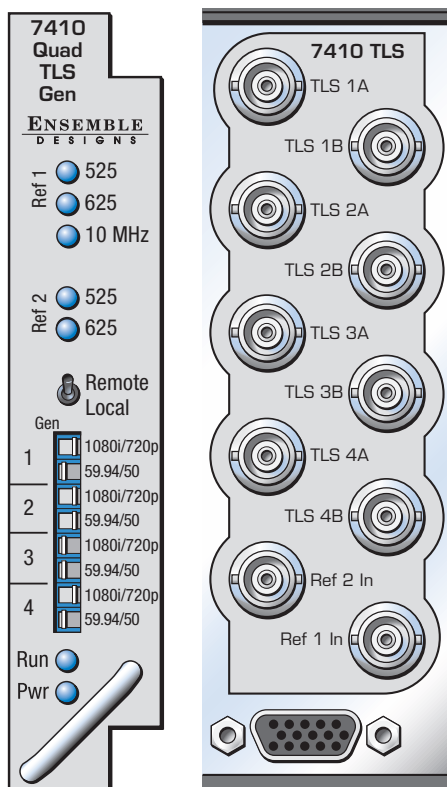

Reference Input

Number	Two on module (and one alternate: Frame Master Reference)
Signal Type	1 V P-P PAL, NTSC, or 10 MHz
Return Loss	>40 dB DC to 5.5 MHz

Tri-Level Sync Output

Number	Eight, 75 Ω
Signal Type	1080i 50, 59.94 or 60 Hz, SMPTE 274M -4,5,6 720p 50, 59.94 or 60 Hz SMPTE 296M -1,2,3 1080p 23.98, 24, 25 Hz SMPTE 274M -9,10,11 1080sF 23.98, 24, 25 Hz RP211 -14,15,16
Output DC	± 50 mV
Return Loss	>30 dB to 30 MHz

General Specifications

Power Consumption	<7.0 watts
Temperature Range	0 to 40°C ambient (all specs met)
Relative Humidity	0 to 95%, noncondensing
Altitude	0 to 10,000 ft

